

PSP.SM



IGBT Based Stabilizers

Single and Three Phase Output
230V, 1-300 kVA



Features and Benefits


- ✓ IGBT, PWM controlled for high efficiency and low output THD
- ✓ Lower size and weight in comparison with traditional transformer based stabilizers.
- ✓ High personalization grade with new mimic display for signals, alarms, meters
- ✓ New generation of AC/AC Dynamic Voltage Restorer (DVR) with active filter features
- ✓ Improving the harmonic distortion of main in load side
- ✓ Fast transient response to main voltage fluctuations
- ✓ Output voltage regulation lower than 0.5% with very high resolution
- ✓ Automatic bypass capability under unit failure
- ✓ Lower maintenance service in comparison with traditional designs
- ✓ Higher mean time between failures
- ✓ Custom design for high power applications up to 300kVA

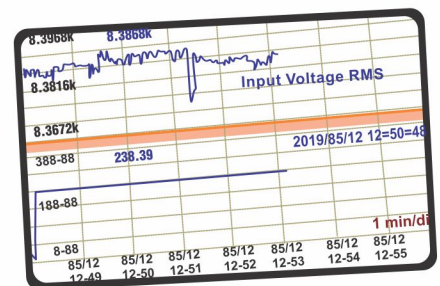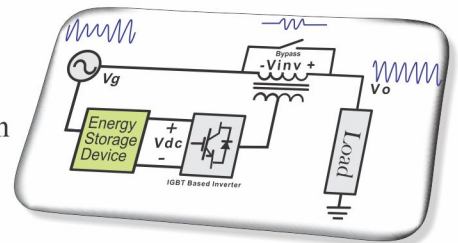

December 2019



Power Supply Production Co.

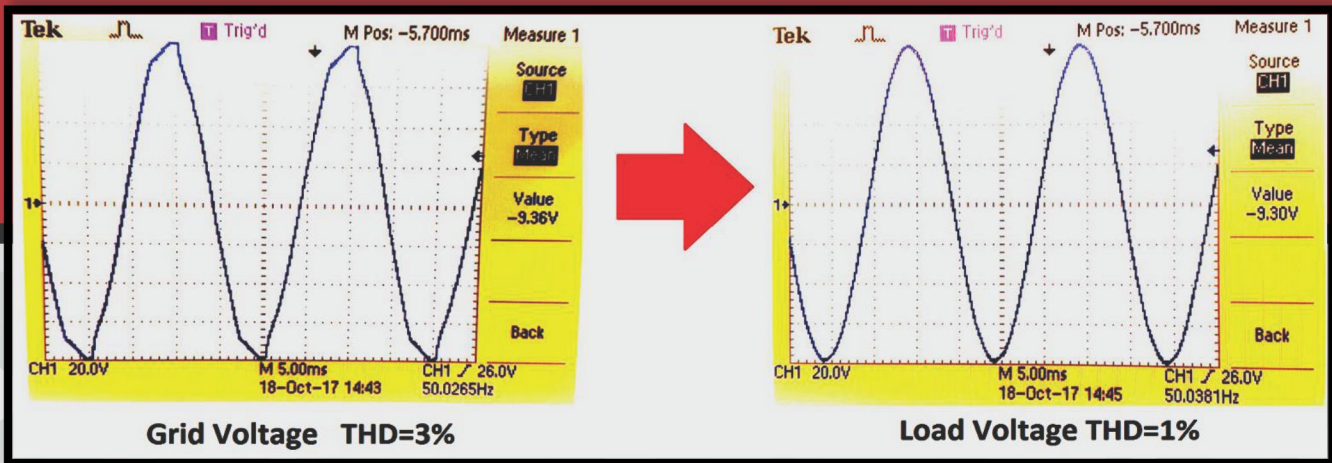

Input AC Voltage	170--255 V
Output Voltage	230 V \pm 1 %
Recovery time	< 5ms
Frequency	50/60 Hz (selectable)
Crest Factor	Max 3
Total Harmonic Distortion-THD	<1% linear load; <5% non-linear load
Overload capability	125% for 10 min; 150% for 1 min; 200% for 100 ms
Efficiency	Up to 99%
Cooling	Forced ventilation
Altitude	<2000 m (derating according to EN 62040)
Audible noise at 1 meter (dBA)	<55 – 70 dB(A) - depending on rating
Operating temperature	-10 °C ÷ +40 °C
Storage temperature	-20 °C ÷ +70 °C

- INDICATORS & ALARMS**
- AVR FAIL
 - Grid Voltage AC LOW/HIGH
 - Over Temperature
 - Over LOAD/SHORT CIRCUIT

Graphical LCD 128x64 or 7"/10" touchable LCD

	R	S	T
Vin	238	239	240
Vout	230	230	230
Iout	0	0	0
Sout	0.0	0.0	0.0
Fre.	50.1		

December 2019



PSP- No.11,8 Alley, Sabounchi St., Beheshti Ave., Tehran, IRAN
 Tel: +9821 88502720-24 Fax: +9821 88767136
 info@psp.ir www.psp.ir